



## DELTAPRES

**DELTAPRES – A free standing unit for domestic boosting, irrigation, water transfer and pressurisation.**  
**Applications**

Automatic supply of water  
whilst maintaining constant



### Configuration


These domestic booster sets can be built in various configurations using a Delta pump with various types of vessels and control devices



## DELTAPRES

- **System Connections**

- 1" BSP 25mm pipe connection to pump suction
- 1" BSP 25mm pipe connection to pressure switch tee

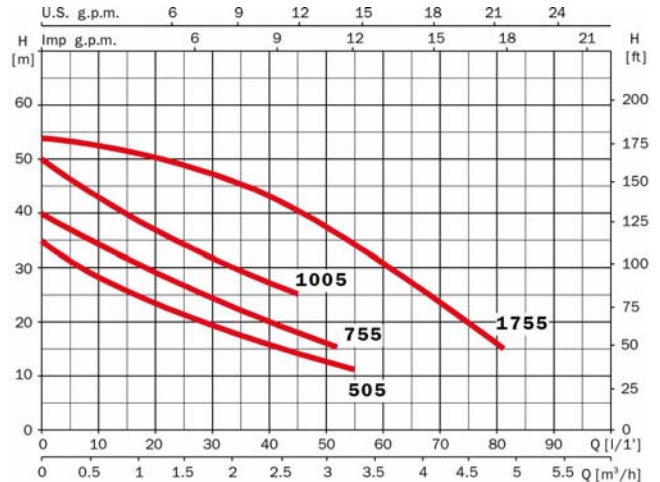

Model	A			P1 (kW)		kW	HP	µF
	1~	3~		1~	3~			
	230v	230v	400v					
Delta 505 M	2.8	2.2	1.2	0.6	0.6	0.37	0.5	12
Delta 755 M	3.4	2.4	1.3	0.8	0.8	0.5	0.75	12
Delta 1005 M	4.8	3.3	1.9	1	1	0.75	1	16

- 24 ltr pressure vessel
- Pressure switch for pump operation.
- Pressure gauge displaying system pressure
- Cast iron pump body
- Class F insulation
- IP 44 protection
- Single phase with built in thermal protection
- Maximum suction lift: 9m

- **Electrical Connections**

The unit should be connected to a 240v single phase supply, via a fused switched outlet fitted with a 13 amp fuse.

- **Location**

The unit should be installed in a dry, well ventilated position, protected from extremes of heat and cold.