

# IRM®-Down-pipe-filter



Down-pipe-filter copper or zinc

## Product advantages

- Low maintenance
- Easy to install
- Retrofit possibility



Rainwater




Greywater

## Equipment

- Installation in down pipe
- Connectable roof space 130m<sup>2</sup>
- Frost-free due to direct discharge of water
- Filter with fine stainless steel mesh
- Efficiency 90%
- Easy inspection due to movable top
- Filter self-cleaning
- According to DIN 1986

## Operation

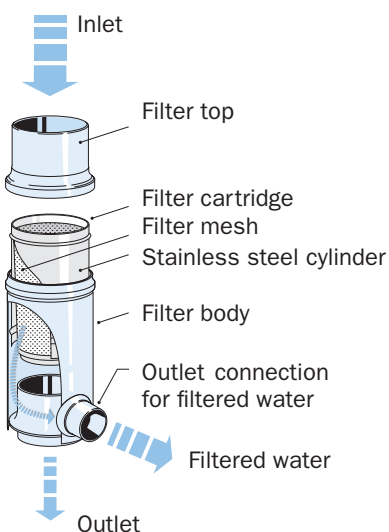

## Specification

IRM®-Downer-pipe-filter zinc		
<b>DN 80 (FFF Zn 80)</b>	Self-cleaning, according to DIN 1986, efficiency 90%, up to 130m <sup>2</sup> roof, mesh width 0,44mm, stainless steel filter cartridge, outlet connection for filtered water DN 50.	For zinc and copper down pipes 80mm
<b>DN 87 (FFF Zn 87)</b>		For zinc and copper down pipes 87mm
<b>DN 100 (FFF Zn 100)</b>		zinc down pipes 100mm
<b>DN 110 (FFF Zn 110)</b>		Plastic down pipe 110mm
IRM®-Downer-pipe-filter copper		
<b>DN 80 (FFF Cu 80)</b>	Self-cleaning, according to DIN 1986, efficiency 90%, up to 130m <sup>2</sup> roof, mesh width 0,44mm, stainless steel filter cartridge, outlet connection for filtered water DN 50.	copper down pipes 80mm
<b>DN 100 (FFF Cu 100)</b>		copper down pipes 100mm

Art.-No.	Description		PG
10285	IRM®-Downer-pipe-filter zinc	DN 80 (FFF Zn 80)	1
10286	IRM®-Downer-pipe-filter zinc	DN 87 (FFF Zn 87)	1
10287	IRM®-Downer-pipe-filter zinc	DN 100 (FFF Zn 100)	1
10288	IRM®-Downer-pipe-filter zinc	DN 110 (FFF Zn 110)	1
10290	IRM®-Downer-pipe-filter copper	DN 80 (FFF Cu 80)	1
10292	IRM®-Downer-pipe-filter copper	DN 100 (FFF Cu 100)	1

