



CROMAPRES

CROMAPRES – A free standing unit for domestic boosting, irrigation, water transfer and pressurisation.
Applications

Automatic supply of water
whilst maintaining constant
system pressure



Configuration


These domestic booster sets can be built in various configurations using a Aspri pump with various types of vessels and control devices



CROMAPRES

- **System Connections**

- 114" BSP 32mm pipe connection to pump suction
- 114" BSP 32mm pipe connection to pressure switch tee

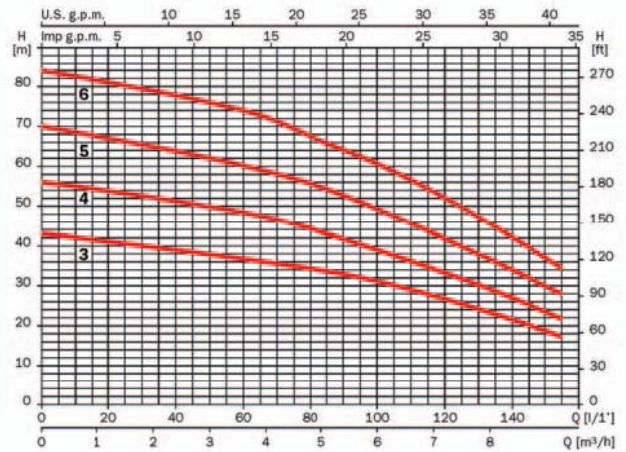

MODEL	A			P1 (Kw)		Kw	HP	uF
	1ph	3ph		1ph	3ph			
	230v	230v	400v					
Aspri 35.3MN	6.7	4.5		1.5		0.8	1	25
Aspri 35.4MN	8.4	5.3		1.8		1.1	1.5	25
Aspri 35.5MN	10.2	6.9		2.3		1.5	2	30

- 24 ltr pressure vessel
- Pressure switch for pump operation.
- Pressure gauge displaying system pressure
- Cast iron pump body
- Class F insulation
- IP 44 protection
- Single phase with built in thermal protection
- Maximum suction lift: 9m

- **Electrical Connections**

The unit should be connected to a 240v single phase supply, via a fused switched outlet fitted with a 13 amp fuse.

- **Location**

The unit should be installed in a dry, well ventilated position, protected from extremes of heat and cold.